



1

Open the G330 front chassis, by unlocking the front panel and then remove the side panel. Press the plastic security hook, situated beside the Floppy Disk Drive space, to free the main front panel. Unscrew the metallic cover and remove it.

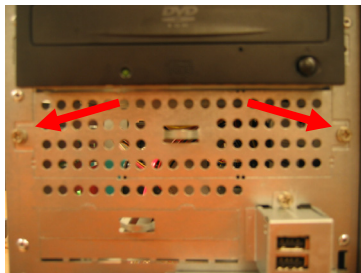


2

Please attach the USB cable to the USB Dongle and then the red SATA cable.

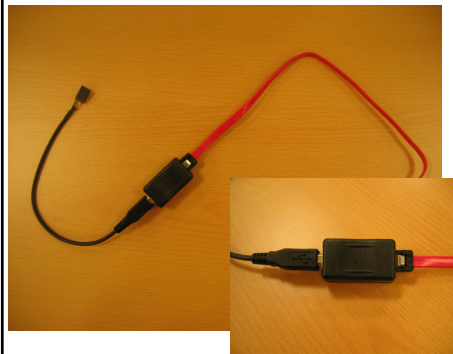



3

Fix all the cables to the chassis by using the plastic locks on the bottom part of the case.

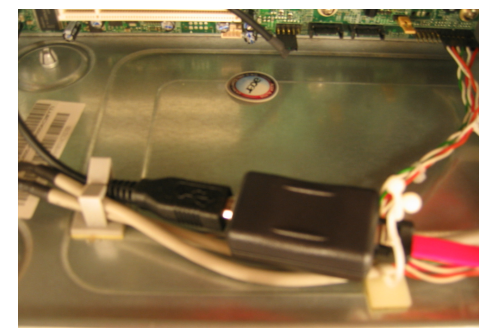


4

Disconnect the USB cable close to the SATA connector. Connect the black usb cable, shown in step 3, to the motherboard, like in the picture.

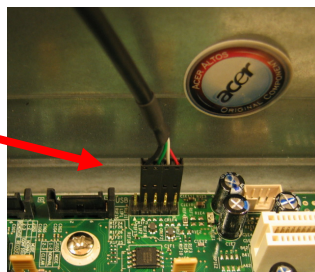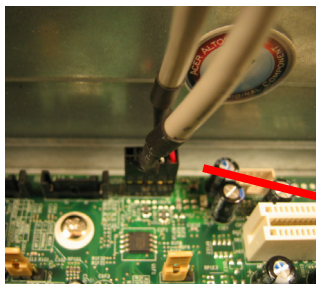

5

Connect the SATA Tape to the data and power cable and then plug it into the chassis.

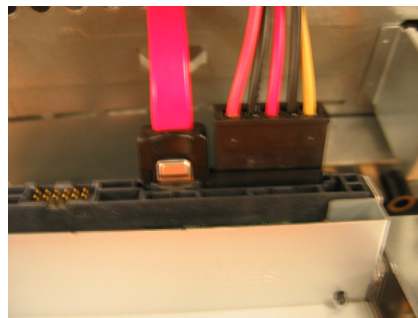

6

Plug the black sticker on the front USB connectors to block them.

